

Nylon Cable Tie




Application

Material: UL approved nylon 66, fireproof grade 94V-2, acid-resistant, corrosion resistance, not easy aging, erosion controlling & insulating, strong bearing capacity.

Color: Standard color is natural (white), and Anti-ultraviolet black and other colors are available as requested.

Operating Temperature: -5°C to 55°C.

Dimensions

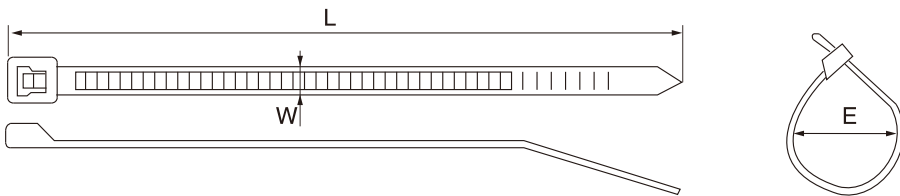

Specification

Model	L,MM	W,MM	Bundle Diameter E,MM	Min. loop Tensile Strength	
				LBS	KGS
3 x 100	100	2.3	2-22	18	8
3 x 120	120	2.3	2-24	18	8
3 x 150	150	2.3	2-35	18	8
3 x 180	180	2.3	3-42	18	8
3 x 200	200	2.3	3-50	18	8
4 x 100	100	3.4	3-22	40	18
4 x 120	120	3.4	3-24	40	18
4 x 150	150	3.4	3-35	40	18
4 x 180	180	3.4	3-42	40	18
4 x 200	200	3.4	3-50	40	18

Model	L,MM	W,MM	Bundle Diameter E,MM	Min. loop Tensile Strength	
				LBS	KGS
4 x 250	250	3.4	3-65	40	18
4 x 300	300	3.4	3-80	40	18
4 x 370	370	3.4	3-102	40	18
5 x 150	150	4.4	3-35	50	22
5 x 180	180	4.4	3-42	50	22
5 x 200	200	4.4	3-50	50	22
5 x 250	250	4.4	3-65	50	22
5 x 300	300	4.4	3-82	50	22
5 x 350	350	4.4	3-90	50	22
5 x 380	380	4.4	3-102	50	22
5 x 400	400	4.4	3-105	50	22
5 x 450	450	4.4	3-130	50	22
5 x 500	500	4.4	3-150	50	22
8 x 150	150	7.2	3-33	120	55
8 x 200	200	7.2	3-50	120	55
8 x 250	250	7.2	4-63	120	55
8 x 300	300	7.2	4-82	120	55
8 x 350	350	7.2	4-90	120	55
8 x 380	380	7.2	4-102	120	55
8 x 400	400	7.2	4-105	120	55
8 x 450	450	7.2	4-118	120	55
8 x 500	500	7.2	4-150	120	55
10 x 450	450	8.8	8-125	175	80
10 x 500	500	8.8	8-150	175	80
10 x 550	550	8.8	8-160	175	80
10 x 600	600	8.8	8-175	175	80
10 x 650	650	8.8	8-190	175	80
10 x 710	710	8.8	10-210	175	80
10 x 760	760	8.8	10-225	175	80
10 x 800	800	8.8	10-240	175	80
10 x 920	920	8.8	10-265	175	80
10 x 1000	1000	8.8	10-295	175	80
12 x 650	650	12	14-190	250	114